

Braeburn®

7320

Up to 3 Heat / 2 Cool Heat Pump
Up to 2 Heat / 2 Cool Conventional
Smart Wi-Fi Universal Thermostat

BlueLink
smart connect



5 YEAR
LIMITED
WARRANTY

Wi Fi

Phone not included.

Thermostat Features

- 7 Day, 5-2 Day or Non-Programmable
- Large 6.5 sq. in. Easy-Read Touchscreen
- Bright Blue Backlight Display
- Auto or Manual Changeover
- Residential or Commercial Modes
- Adjustable Temperature Limits
- Wireless or Wired Remote Sensing
- Auxiliary Heat Fossil Fuel Option
- Hardwire or Battery Powered*
- Humidification and Dehumidification Control with 7330 Wireless Sensor
- Auxiliary "A" Terminal for Economizer, Fresh Air or Output Control

FREE Contractor Branding!
Visit braeburnonline.com

Application Features

- Compatible with Virtually All Smartphones, Tablets or PC's
- Multi-Color Program Groups Simplify Scheduling
- Text and E-Mail Service and Temperature Alerts
- QuickCopy™ Allows User to Duplicate Program and Configuration to Other Thermostats
- SmartData™ Energy Report Capability (Fall 2015)
- Monitor and Control Multiple Thermostats
- View Outdoor Temperature**
- Adjust and View Indoor Humidity**
- Easy Access Dealer Information
- Help Screens Guide User Through Application



Download on the
App Store

ANDROID APP ON
Google play

min. OS 7.1.2

min. OS 4.1.2

www.bluelinksmartconnect.com



*Common "C" wire required to use Wi-Fi. **Optional sensors required.

Toll-Free 866.268.5599 (U.S.) +1.630.844.1968 (Outside the U.S.)

BlueLink™ Application Screens



Multi-Color Program Groups

Simplifies program scheduling by allowing user to group days and walk through programming set points, times and temperatures quickly and easily.

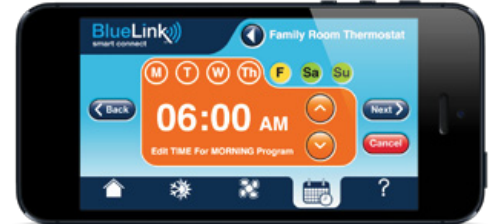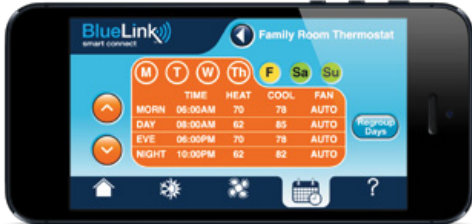

SmartData™ Energy Reports (Available Fall 2015)


Gives the user the capability of retrieving usage data for individual thermostats for specific time periods.

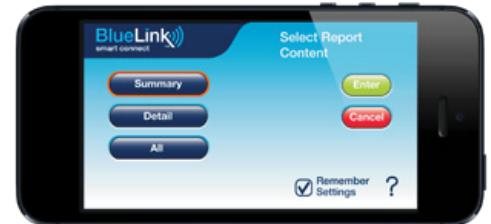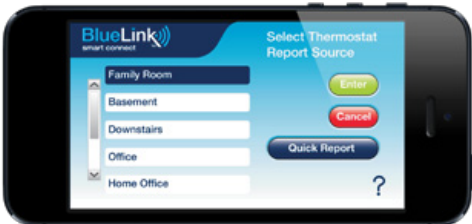

QuickCopy™ Feature

Service and Temperature Alerts

Service Dealer Information

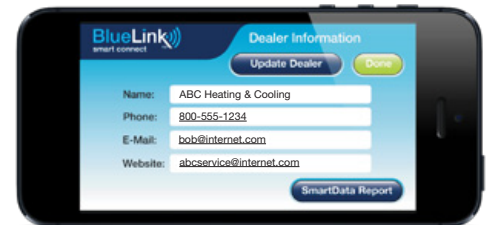

Product Specifications

Dimensions:	3.94" x 5.56" x 1.19"
Electric Rating:	24 Volt AC (18-30 Volt AC) 1 amp maximum load per terminal 6 amp total maximum load (all terminals)
AC Power:	18-30 Volt AC (required for Wi-Fi)
DC Power:	3.0 Volts DC (2 "AA" Alkaline batteries included)
Compatibility:	Heat pump systems up to 3 heat/2 cool, Conventional systems up to 2 heat/2 cool
Wi-Fi Communication:	802.11 b/g/n (requires 24 VAC with C wire)
Control Range:	45° to 90° F (7° to 32° C)
Display Range:	40° to 99° F (5° to 37° C)
Accuracy:	+/- 1° F (+/- .5° C)
Terminations:	Rh, Rc, C, W2/AUX, W1/E, L, A, O/B, G, Y2, Y1, K, S2, S1

Shipping Information

INDIVIDUAL CARTON
Dimensions: 5.0" x 6.3" x 2.0"
Weight: 0.9 lbs.

MASTER CARTON
Quantity: 3
Dimensions: 6.4" x 13" x 5.6"
Cubic Feet: .27
Weight: 6 lbs.

Braeburn 7320 Replaces*

Honeywell®	TH8320WF, TH6320WF, TH9320WF, TH8732WF	Pro1®	T855i
Emerson®	1F86U-42WF	Nest®	T100577, T200577
		Venstar®	T5800**, T5900**

*Verify specific application requirements. All trademarks are the property of their respective owners.
**Requires separate Wi-Fi key.

Accessories

7330	Wireless Remote Humidity Sensor	2950	Universal Wall Plate (6.5" x 6.5" x .125")
7340	Share-a-Wire™ Module	5390	Wired Remote Indoor Sensor
7390	Wireless Remote Indoor Sensor	5490	Wired Remote Outdoor Sensor
7490	Wireless Remote Outdoor Sensor	5970	Universal Thermostat Guard

FREE Contractor Branding Available!

Visit our website (www.braeburnonline.com) for more information, contact your local distributor or call our sales department toll-free at 866.268.5599 (U.S.), +1.630.844.1968 (Outside the U.S.).