



MARS

SunSlinger Series

- Designed for 70°C (158° F) ambient temperature
- Packaged with mounting hardware
- All angle mounting
- Ball bearing
- 36" lead lengths
- Reversible
- Thru bolt or band mounting
- Rheem mounting holes with screws installed
- Trane 4.33 bolt circle mounting holes






MARS Brand Condenser Fan Motors

Condenser Fan Motors

MARS Brand 70°C SunSlinger totally enclosed condenser fan motors are designed for either vertical shaft-up or shaft-down applications in a variety of ambient conditions. Shell and end shields are enclosed for weather protection. A weep hole is provided in each end shield to allow condensate to drain. All of these motors are suitable for air conditioning or heat pump applications. All MARS SunSlinger motors feature Rheem shell and Trane 4.33 bolt circle mounting holes.

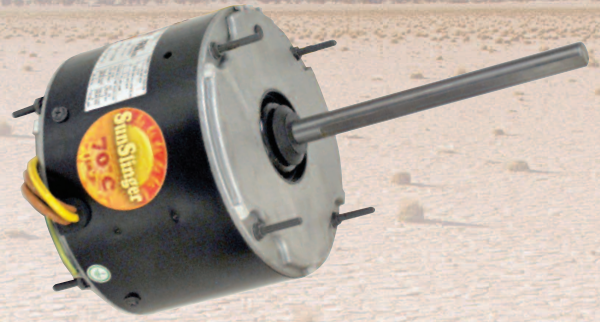

1075 RPM – Reversible – 208-230 Volt – Single Speed

MARS NO.	HP	AMPS	CAP REQUIRED	DIMENSIONS			REPLACES			
				A	B	C	EMR #	AOS #	D'Tech #	GE Genteq
20727	1/6	0.9	5/370	6.50	4.25	1/2	1859H	FE1016SF	WG840727HT	03727HS
20728	1/4	1.8	5/370	6.50	4.72	1/2	1860H	FE1026SF	WG840728HT	03728HS
20729	1/3	2.4	7.5/370	6.50	5.24	1/2	1861H	FE1036SF	WG840729HT	03729HS
20730	1/2	3.5	10/370	6.50	5.91	1/2	1862H	FE1056SF	WG840730HT	03730HS
20731	3/4	5.2	10/370	6.50	6.50	1/2	1868H	FE1076SF	WG840731HT	03731HS

825 RPM – Reversible – 208-230 Volt – Single Speed

MARS NO.	HP	AMPS	CAP REQUIRED	DIMENSIONS			REPLACES			
				A	B	C	EMR #	AOS #	D'Tech #	GE Genteq
20403	1/6	1.0	5/370	6.50	4.52	1/2	1873H	FE1018SF	N/A	03403HS
20404	1/4	2.2	5/370	6.50	4.92	1/2	1874H	FE1028SF	WG840404HT	03404HS
20405	1/3	1.9	7.5/370	6.50	5.31	1/2	1875H	FE1038SF	WG840405HT	03405HS
20746	1/2	2.8	7.5/370	7.00	6.42	1/2	1870H	FE1058SF	N/A	03746HS

Multi-Horsepower Condenser Fan Motors

MARS Brand 70°C multi-horsepower SunSlinger condenser fan motors are ideal for truck stock. They are designed to provide reliable operation in a wide range of ambient temperatures. Three 1075 RPM models cover 208-230 volt applications from 1/6 to 1/2 HP. Two 825 RPM models cover 208-230 volt applications from 1/8 to 1/3 HP. All MARS SunSlinger motors feature Rheem shell and Trane 4.33 bolt circle mounting holes.



Two Speed – Reversible

MARS No.	HP	RPM/Speeds	VOLTAGE	AMPS	CAP REQ.	DIMENSIONS			REPLACES			
						A	B	C	EMR #	AOS #	D'Tech #	GE Genteq
20465	1/6-1/3	1075/2	208-230	2.5	5/7.5/370	6.97	5.16	1/2	5462H	N/A	WG840465	03465HS
20468	1/5-1/2	1075/2	208-230	3.6	10/12.5/370	5.00	6.10	1/2	5465H	N/A	WG840468	03468HS
20469	1/6-1/3	825/2	208-230	2.2	10/7.5/370	5.00	6.10	1/2	5464H	N/A	WG840469	03469HS

Single Speed – Reversible

20458	1/6-1/3	1075	208-230	2.8	7.5/370	6.50	5.00	1/2	3323H	ORM5458BF	N/A	03458HS
20459	1/8-1/3	825	208-230	1.9	10/370	6.50	5.71	1/2	N/A	ORM5488BF	N/A	03459HS

98734

©2012 MOTORS & ARMATURES, Inc.

All rights reserved. This catalog may not be reproduced in whole or in part in any form without written permission from Motors & Armatures, Inc. MARS is a registered trademark of Motors & Armatures, Inc. MARS part numbers are trademarks of Motors & Armatures, Inc.

www.marsdelivers.com

